

## Dust cap for Tank unit / Adapter

A wide option of Caps. The Caps is secured against accidental fall off.

Use the Mann Tek Dust cap to prevent ingress of dirt and water in the couplings. The material in the Dust cap is Composite, Aluminium, Rubber and Stainless Steel.

It's only possible to remove the cap from the Tank unit / Adapter after pulling the securing stift and at the same time twisting the cap.

### Features

- Elastic v-ring seal in standard NBR that make disassembly easier.
- Lockable and sealed
- Patented design,


### Composite

Patent No. 000840780-0001



Aluminium

### Stainless Steel

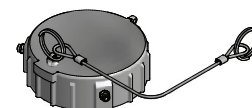

### Rubber



Inch DN	Material <sup>1)</sup>	Seal <sup>2)</sup>	Weight		Code No
			Kg	lbs	
<b>3/4"-1"</b> Ø56 mm, DN 20-25	Co	Standard: <b>FPM</b> (Viton®)	0,13	0.287	<b>C100A2201</b>
	Al		0,22	0.485	<b>C100A1101</b>
	SS		0,59	1.301	<b>C100A4401</b>
<b>1½"-2"</b> Ø70 mm, DN 40-50	Co	NBR (Nitrile®)			<b>C200E2202</b>
	Al	Standard: <b>FPM</b> (Viton®)			<b>C200A1101</b>
	SS				<b>C200C4401</b>
	Rubber				<b>C200D1300</b>
<b>2½"</b> Ø105 mm, DN 65	Co	NBR (Nitrile®)			<b>C300E2202</b>
	Al	Standard: <b>FPM</b> (Viton®)			<b>C300A1101</b>
	SS				<b>C300C4401</b>
<b>3"</b> Ø119 mm, DN 80	Co	NBR (Nitrile®)			<b>C400E2202</b>
	Al	Standard: <b>FPM</b> (Viton®)			<b>C400A1101</b>
	SS				<b>C400C4401</b>
<b>4"</b> Ø164 mm, DN 100	Co	Standard: <b>FPM</b> (Viton®)			<b>C500E2202</b>
	Al				<b>C500B1101</b>
	SS				<b>C500C4401</b>
<b>6"</b> Ø238 mm, DN 150	Co	Standard: <b>FPM</b> (Viton®)			<b>C600A2201</b>
	Al				<b>C600A1101</b>
	SS				<b>C600A4401</b>
<b>8"</b> Ø272 mm, DN 200	Al	Standard: <b>FPM</b> (Viton®)			<b>C800B1101</b>
	SS				<b>C800B4401</b>



Rubber

<sup>1)</sup> Mtrl: Al=Aluminium, SS=Stainless Steel, Co=Composite (Polyetylen), Rubber  
<sup>2)</sup> Standard sealings FPM (Viton®). Other on request.

Viton® (FPM) and Teflon® (FPM/KPM) are registered trademarks of DuPont, DuPont Elastomers. Vulkollan® is registered trademark of Bayer AG

## Sealing cap for Tank unit / Adapter - 10 bar / 150psi

Sometimes a simple protection of the Dry Disconnect Couplings Tank unit against pollution is not sufficient. International regulations can require a sealing function of the cap as an additional safety factor in case of worn out gaskets in the tank unit. The sealing cap is a costeffective solution to fulfil these requirements.

Inch DN	Material <sup>1)</sup>	Seal <sup>2)</sup>	Weight		Code No
			Kg	lbs	
<b>3/4"-1"</b> Ø56 mm, DN 20-25	SS	Standard: <b>FPM</b> (Viton®)	0,59	1,301	<b>C100P4401</b>
<b>1½"-2"</b> Ø70 mm, DN 40-50	Al				<b>C200P1101</b>
	SS				<b>C200P4401</b>
<b>2½"</b> Ø105 mm, DN 65	SS				<b>C300P4401</b>
<b>3"</b> Ø119 mm, DN 80	Al				<b>C400H1101</b>
	SS				<b>C400P4401</b>
<b>4"</b> Ø164 mm, DN 100	SS				<b>C500P4401</b>




- <sup>1)</sup> Mtrl: Co=Composite (Polyetylen), Al=Aluminium, SS=Stainless Steel  
<sup>2)</sup> Standard sealings FPM (Viton®). Other on request.

## Dust plug for Hose unit / Coupler

Use the Mann Tek Dust Plug to prevent ingress of dirt and water in the couplings. The material in the Dust Plug is Composite, Aluminium, Rubber and Stainless Steel.

Inch DN	Material <sup>1)</sup>	Seal <sup>2)</sup>	Weight		Code No
			Kg	lbs	
<b>3/4"-1"</b> Ø56 mm, DN 20-25	Co	Standard: <b>FPM</b> (Viton®)	0,06	0.137	<b>P100A2201</b>
	Al		0,12	0.265	<b>P100A1101</b>
	SS		0,32	0.705	<b>P100A4401</b>
<b>1½"-2"</b> Ø70 mm, DN 40-50	Co				<b>P200A2201</b>
	Al				<b>P200A1101</b>
	SS				<b>P200A4401</b>
<b>2½"</b> Ø105 mm, DN 65	Co				<b>P300A2201</b>
	Al				<b>P300A1101</b>
	SS				<b>P300A4401</b>
<b>3"</b> Ø119 mm, DN 80	Co				<b>P400A2201</b>
	Al				<b>P400A1101</b>
	SS				<b>P400A4401</b>
<b>4"</b> Ø164 mm, DN 100	Co				<b>P500B2201</b>
	Al				<b>P500B1101</b>
	SS				<b>P500A4401</b>
<b>6"</b> Ø238 mm, DN 150	Co				<b>P600A2201</b>
	Al				<b>P600A1101</b>
	SS				<b>P600A4401</b>
<b>8"</b> Ø272 mm, DN 200	Al				<b>P800A1101</b>
	SS				<b>P800A4401</b>

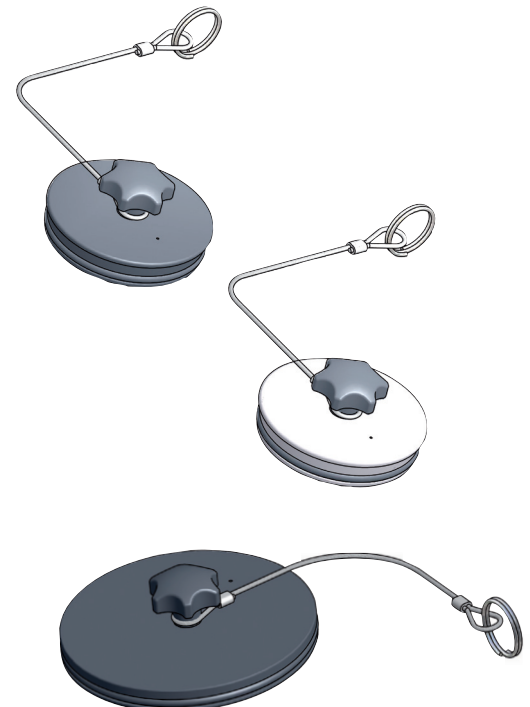

- <sup>1)</sup> Mtrl: Co=Composite (Polyetylen), Al=Aluminium, SS=Stainless Steel  
<sup>2)</sup> Standard sealings FPM (Viton®). Other on request.

Viton® (FPM) and Teflon® (FPM/KPM) are registered trademarks of DuPont, DuPont Elastomers. Vulkollan® is registered trademark of Bayer AG